

access

L I G H T I N G

INSTALLATION INSTRUCTIONS

IMPORTANT

Before assembling your access lighting fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.



NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be in accordance with all ordinances, Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" x 2 1/2" metal octagon outlet box. The box must be directly supported by the building structure and U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation disconnect the Power by turning off the Circuit Breaker or by removing the fuse at the fuse box. Just turning the light off at the light switch is not sufficient to prevent electrical shock.

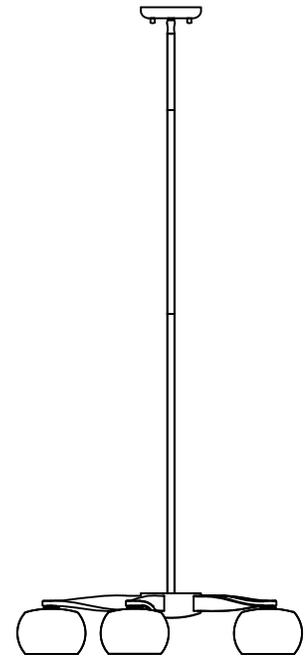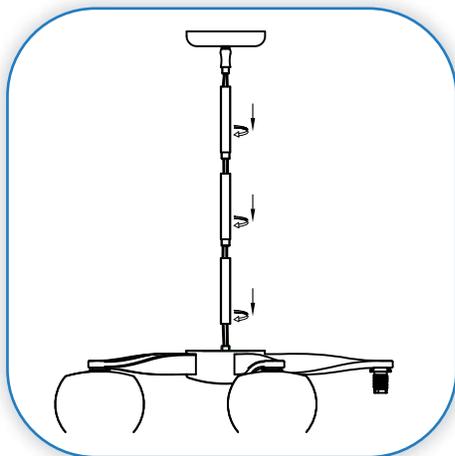

COLLECTION

GLAM

APPLICATION

Chandelier

MODEL NO.

52120

WHAT WE PROVIDE

- Mounting Hardware
- Crossbar Plate
- 5 x Glass and crystal beads shades
- 3pcs rods, 6", 16" and 22"
- 5 x 48W Xenon G9 Bulbs

WHAT YOU NEED


- Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code

For energy saving, this fixture is supplied with 48W G9/ER bulbs, which is equivalent to 60W standard G9 Halogen.

1

PREPARE FIXTURE


If there is an existing fixture remove it.
Tighten 3pcs rods to the canopy and fixture.
Expose the supply wire from the outlet box.
Mount the crossbar to the junction box with the supplied screws

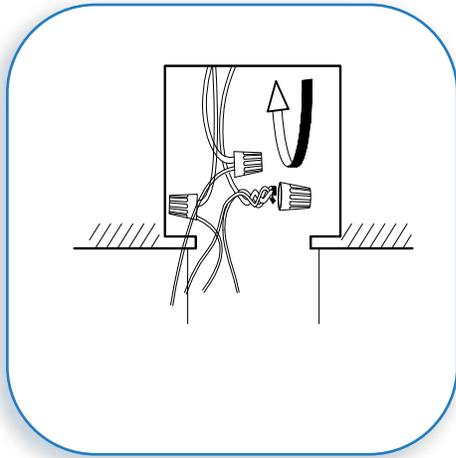

2

MAKE WIRE CONNECTIONS


Gently pull the supply wires through the hole in the crossbar. Connect the black supply wire to the black fixture wire. Secure with the supplied wire nuts. Connect the white supply wires to the white fixture wire. Secure with the supplied wire nuts. Either wrap the green wire around one of the protruding screws or connect it to the supply ground wire. Secure all wire with electrical tape (not supplied). Tuck all wires carefully into the J-Box.

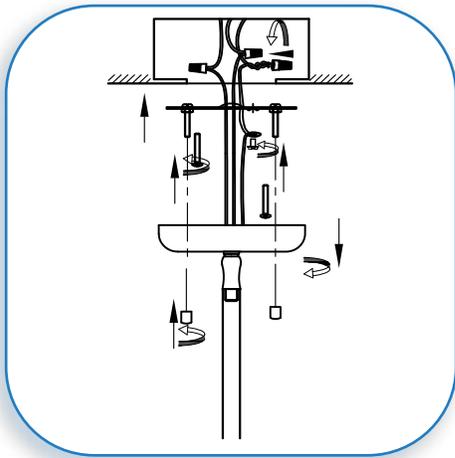

3

MOUNT FIXTURE TO THE CROSSBAR PLATE


Position the canopy over the crossbar plate. Align the hole in the center of canopy and secure with the supplied thumb screws.

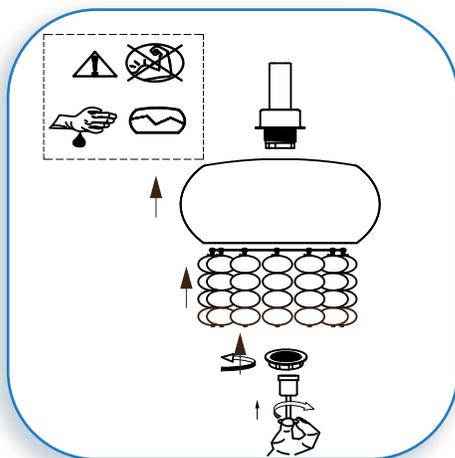

4

SECURE THE GLASS AND CRYSTAL BEADS SHADES

Hold the glass and crystal beads shades to the fixture and fitting over the socket. Secure with the supplied socket rings. Do not overtighten the socket ring to ensure that the glass does not crack.

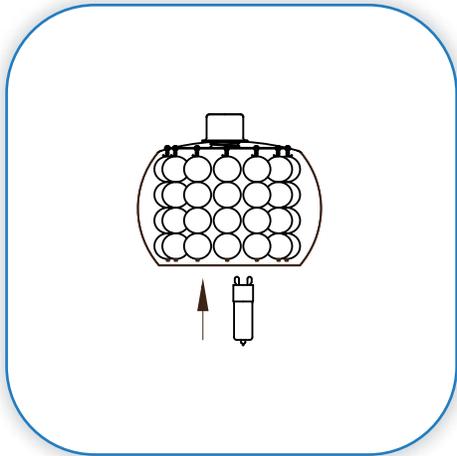


5

INSERT THE BULBS

Insert the bulbs.

MAXIMUM WATTAGE 48W.

DO NOT EXCEED THE WATTAGE AS STATED
ON THE WARNING LABEL AND IN THE INSTRUCTION
SHEETS

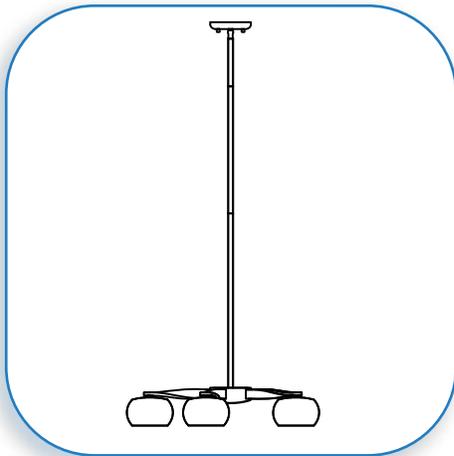

6

RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW ACCESS FIXTURE

